


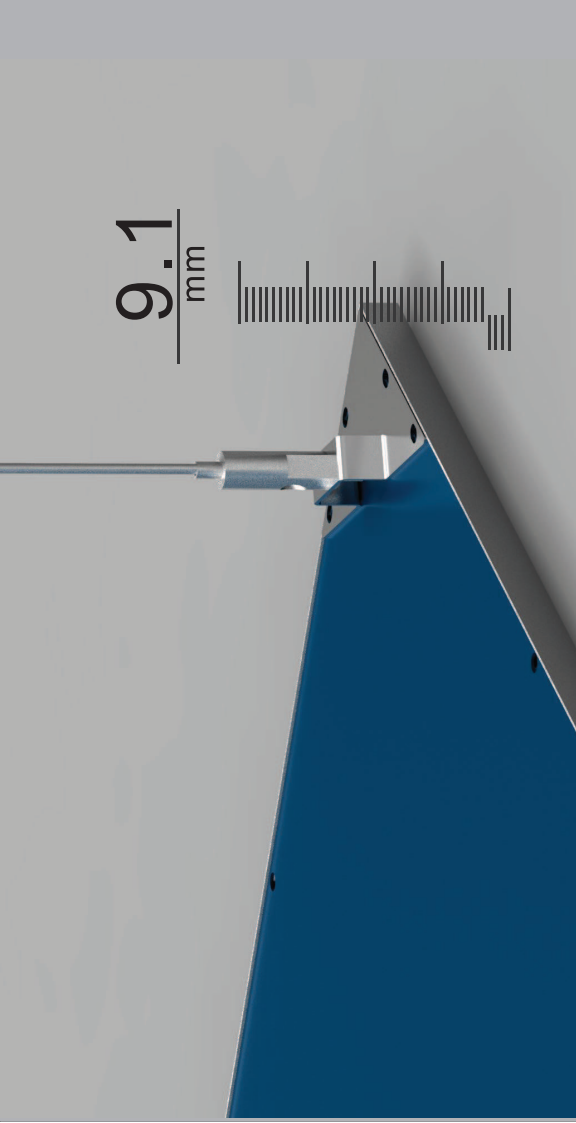






Wire Suspend

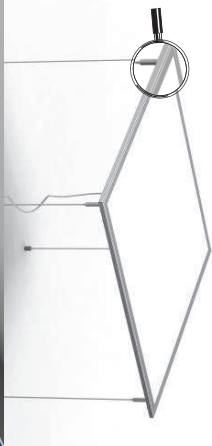



Mounted to the ceiling



Recessed frame with spring

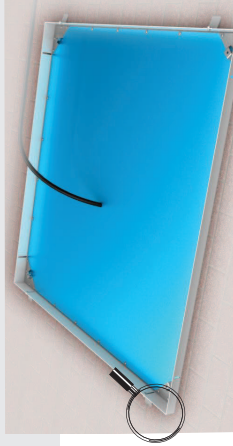

Recessed in the ceiling

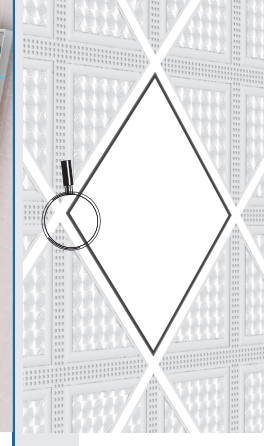

Motion sensor



2.4G occupancy sensor




Daylight sensor



Emergency



DALI

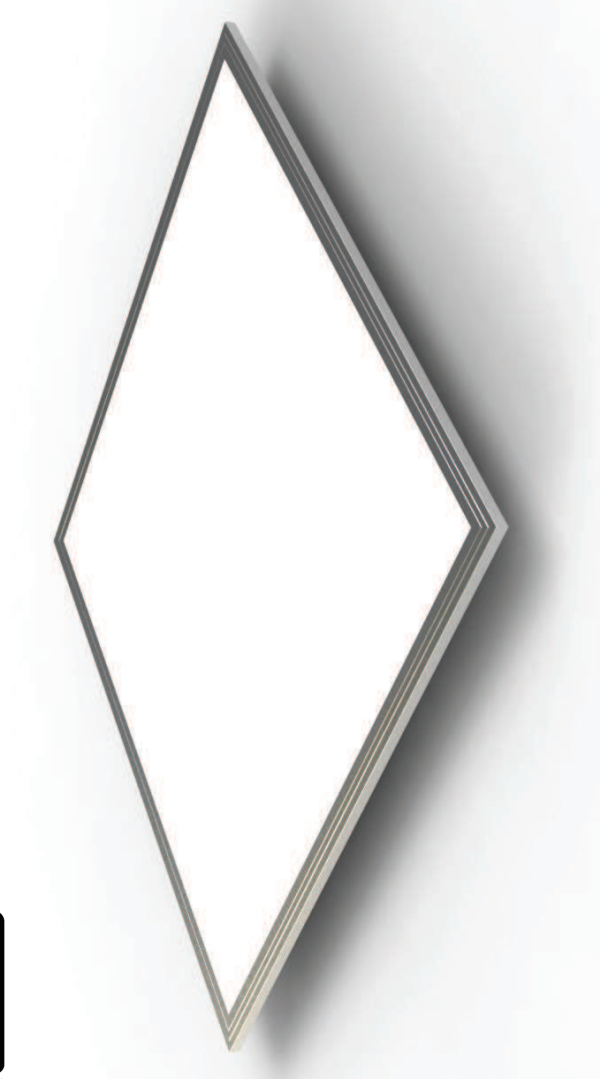

LED.Licht.Lösungen

Brenner GmbH

1230 Wien/AUT - Isopodgasse 22
T 0664 4554 227 · F (01) 3180 567

panel light




Aluminum Heatsink

For rapid heat dissipation



PET Film 0.3mm thickness film

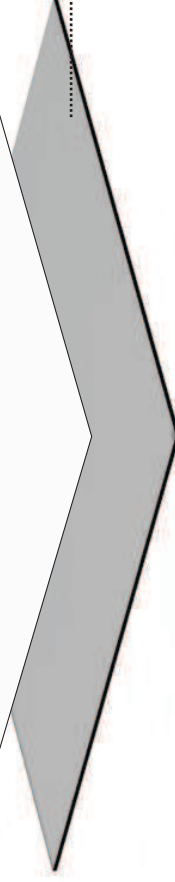

Light Guide

Light guide which is more capable for uniform light distribution



High Transmission Diffuser




High Output lumen Led

Lumen efficiency :160lm/w



Slim Aluminum frame

Slim, light weighted, easy for transportation and installation



CLASS III



Dimension	Wattage	LED type	Type
33---295X295mm			EU0--Regular size
66---595X595mm			
66---620X620mm	18W/36W/48W/72W	C:SMD5730	GE0--Special Germany size
312---295X1195mm			
612---595X1195mm			

PARAMETER CLASS III



Dimension	1X1ft(295*Φ295mm)	2X2ft(595*Φ595mm)	2X2ft(620*Φ620mm)
Rated Power	18W	36W	36W
Luminous Flux	1800lm	3600lm	3600lm
Dimming	Dimmable	Dimmable	Dimmable




Dimension	2X2ft(595*Φ595mm)	2X2ft(620*Φ620mm)
Rated Power	48W	48W
Luminous Flux	4800lm	4800lm
Dimming	Dimmable	Dimmable



Dimension	1X4ft(295*Φ1195mm)	1X4ft(295*Φ1195mm)	1X4ft(295*Φ1195mm)	2X4ft(595*Φ1195mm)
Rated Power	36W	48W	48W	72W
Luminous Flux	3600lm	4800lm	5250lm	7200lm
Dimming	Dimmable	Dimmable	Dimmable	Dimmable

Seilabhängung optional



2 meter Transpanent DC wire

LED.Licht.Lösungen

Brenner GmbH

1230 Wien/AUT · Isoppgasse 22
T 0664 4554 227 · F (01) 3180 567