







1.23



PISTON



APLICACIONES INDICADAS / SUITABLE APPLICATIONS / APPLICATIONS APPROPRIÉES

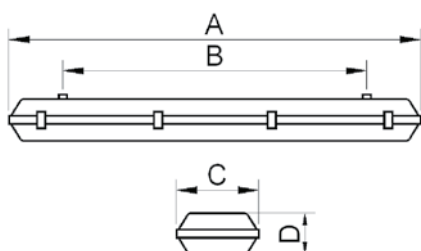


LED.Licht.Lösungen

Brenner GmbH

1230 Wien/AUT · Isoppgasse 22
T 0664 4554 227 · F (01) 3180 567



RG1	MACADAM 3/4	UGR <19	 CR>80	L70B50 > 50.000	IP65	IK07	CE EN 60598-1
------------	-----------------------	-------------------	--	-------------------------------------	-------------	-------------	-----------------------------



Ref.	Tamaño Size Dimension	Potencia Watts Puissance	Emisión Light emission Intensité lum.	Emisión neta Net output Flux sortant	Tª color Tª colour Tª couleur	A	B	C	D	Cierre Fasteners Fermetures	Embalaje Packaging Emballage
		(W)	(Lm)	(Lm)	(°K)	(mm)	(mm)	(mm)	(mm)		
PI113	600	24	2980	2420	3000	664	260	160	110	6	1
PI114	600	24	3200	2598	4000	664	260	160	110	6	1
PI123	600	32	5120	4157	3000	664	260	160	110	6	1
PI124	600	32	5340	4336	4000	664	260	160	110	6	1
PI213	1200	48	5960	4840	3000	1274	870	160	110	8	1
PI214	1200	48	6400	5197	4000	1274	870	160	110	8	1
PI223	1200	64	10240	8315	3000	1274	870	160	110	8	1
PI224	1200	64	10680	8672	4000	1274	870	160	110	8	1
PI313	1500	58	7440	6041	3000	1575	650	160	110	12	1
PI314	1500	58	8000	6496	4000	1575	650	160	110	12	1
PI323	1500	80	12620	10247	3000	1575	650	160	110	12	1
PI324	1500	80	13400	10881	4000	1575	650	160	110	12	1

ACCESORIOS PISTON / PISTON ACCESORIES / ACCESSOIRES PISTON



Ref.

S2150

Grapa de acero inoxidable
Stainless steel clip
Clip acier inox



S2151

Sujeción a carril
Rail fastening
Platine de fixation sur rail



LÍNEA CONTINUA
CONTINUOUS LINE CONNECTION
CÂBLAGE TRAVERSANT

3 polos / 3 poles / 3 pôles

Ref. Q0883

5 polos / 5 poles / 5 pôles

Ref. Q0887






1-10
DALI

EMERGENCY
1h / 3h


1.24



PISTON ECO

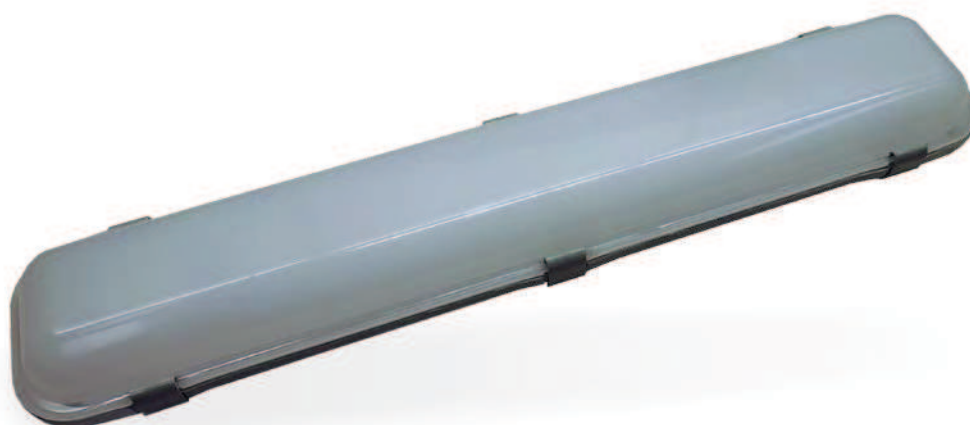

APLICACIONES INDICADAS / SUITABLE APPLICATIONS / APPLICATIONS APPROPRIÉES

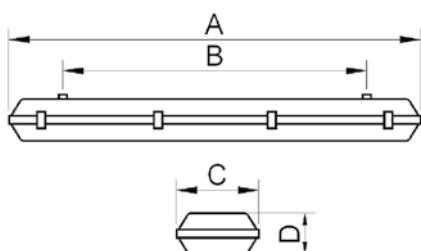



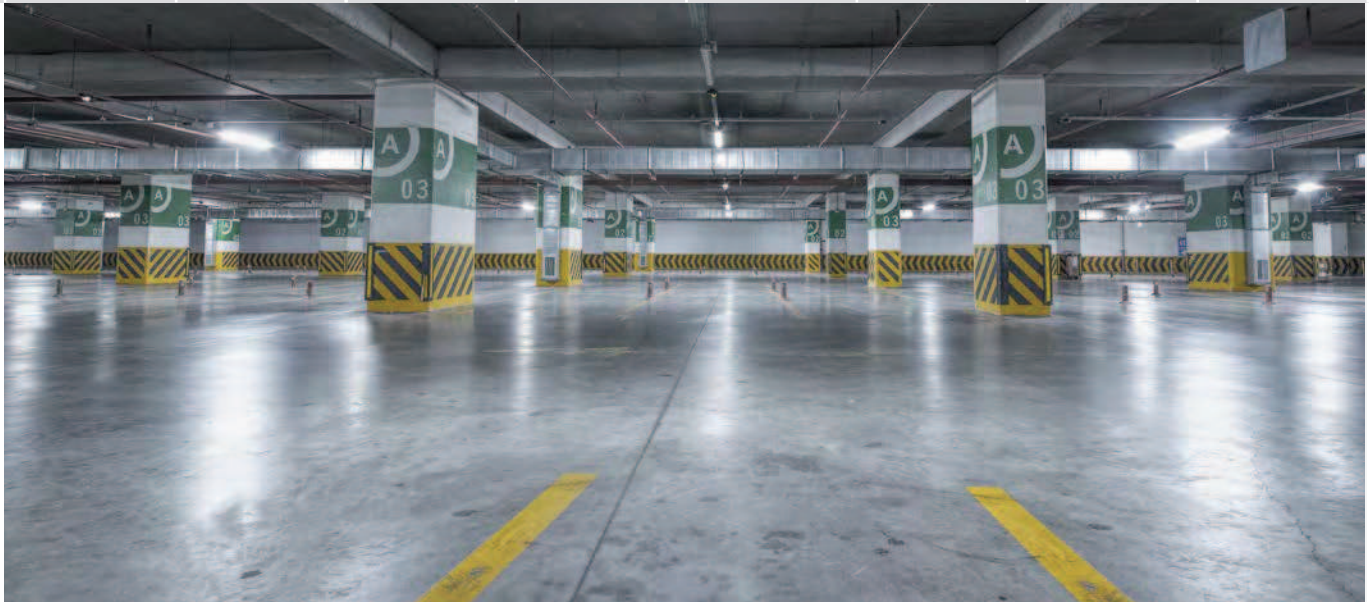
LED.Licht.Lösungen

Brenner GmbH

1230 Wien/AUT · Isoppgasse 22
T 0664 4554 227 · F (01) 3180 567



RG1	MACADAM 3/4	UGR <19	 CR>80	L70B50 > 50.000	IP65	IK07	CE EN 60598-1
-----	----------------	------------	--	-----------------------	------	------	------------------



Ref.	Tamaño Size Dimension	Potencia Watts Puissance	Emisión Light emission Intensité lum.	Emisión neta Net output Flux sortant	Tª color Tª colour Tª couleur	A	B	C	D	Cierre Fasteners Fermetures	Embalaje Packaging Emballage
		(W)	(Lm)	(Lm)	(°K)	(mm)	(mm)	(mm)	(mm)		
PC113	600	13	1490	1210	3000	664	260	100	110	6	1
PC114	600	13	1550	1259	4000	664	260	100	110	6	1
PC123	600	16	2560	2079	3000	664	260	100	110	6	1
PC124	600	16	2670	2168	4000	664	260	100	110	6	1
PC213	1200	24	2980	2420	3000	1274	870	100	110	8	1
PC214	1200	24	3200	2598	4000	1274	870	100	110	8	1
PC223	1200	32	5120	4157	3000	1274	870	100	110	8	1
PC224	1200	32	5340	4336	4000	1274	870	100	110	8	1
PC313	1500	29	3720	3021	3000	1575	650	100	110	12	1
PC314	1500	29	4000	3248	4000	1575	650	100	110	12	1
PC323	1500	40	6310	5124	3000	1575	650	100	110	12	1
PC324	1500	40	6700	5440	4000	1575	650	100	110	12	1

ACCESORIOS PISTON / PISTON ACCESSORIES / ACCESSOIRES PISTON



Ref.

S2150

Grapa de acero inoxidable
Stainless steel clip
Clip acier inox



S2151

Sujeción a carril
Rail fastening
Platine de fixation sur rail



LÍNEA CONTINUA
CONTINUOUS LINE CONNECTION
CÂBLAGE TRAVERSANT

3 polos / 3 poles / 3 pôles

Ref. Q0883

5 polos / 5 poles / 5 pôles

Ref. Q0887

1-10
DALI

EMERGENCY
1h / 3h