






LED-Feuchtraumleuchte 6/12/15



APLICACIONES INDICADAS / SUITABLE APPLICATIONS / APPLICATIONS APPROPRIÉES

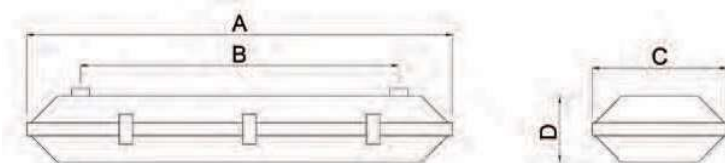


FRL 65_07



RG 0/1	MACADAM 3/4	UGR <19	CR>80	L70B50 > 50.000	IP65	IK07	CE EN 60598-1
--------	----------------	------------	-------	-----------------------	------	------	------------------



2 MÓDULOS LED / 2 LED MODULES / 2 MODULES LED

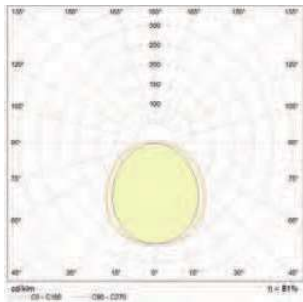

	Tamaño Size Dimension	Potencia Watts Puissance	Emisión Light emission Intensité lum.	Emisión neta Net output Flux sortant	Tª color Tª colour Tª couleur	A	B	C	D	Cierre Fasteners Fermetures	Embalaje Packaging Emballage
	(mm)	(W)	(Lm)	(Lm)	(°K)	(mm)	(mm)	(mm)	(mm)		
13	600	24	2980	2420	3000	664	260	160	110	6	1
14	600	24	3200	2598	4000	664	260	160	110	6	1
23	600	32	5120	4157	3000	664	260	160	110	6	1
24	600	32	5340	4336	4000	664	260	160	110	6	1
13	1200	48	5960	4840	3000	1274	870	160	110	8	1
14	1200	48	6400	5197	4000	1274	870	160	110	8	1
23	1200	64	10240	8315	3000	1274	870	160	110	8	1
24	1200	64	10680	8672	4000	1274	870	160	110	8	1
13	1500	58	7440	6041	3000	1575	650	160	110	12	1
14	1500	58	8000	6496	4000	1575	650	160	110	12	1
23	1500	80	12620	10247	3000	1575	650	160	110	12	1
24	1500	80	13400	10881	4000	1575	650	160	110	12	1

ACCESORIOS



Ref.

Grapa de acero inoxidable
Stainless steel clip
Clip acier inox



Sujeción a carril
Rail fastening
Platine de fixation sur rail

Brenner vuK GmbH LED.beLICHTungen

AT - 1230 Wien · Isoppgasse 22
T 0664 4554227 · F (01) 318 0567
LED.at@aon.at · www.led-brenner.at

LÍNEA CONTINUA
CONTINUOUS LINE CONNECTION
CÂBLAGE TRAVERSANT

3 polos / 3 poles / 3 pôles

5 polos / 5 poles / 5 pôles

1-10
DALI

EMERGENCY
1h / 3h


FRL 65_07 eco



RG 0/1	MACADAM 3/4	UGR <19	CR>80	L70B50 > 50.000	IP65	IK07	CE EN 60598-1
--------	----------------	------------	-------	-----------------------	------	------	------------------



1 MÓDULO LED / 1 LED MODULES / 1 MODULES LED

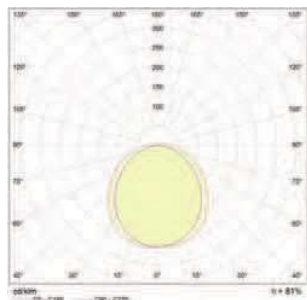

	Tamaño Size Dimension	Potencia Watts Puissance	Emisión Light emission Intensité lum.	Emisión neta Net output Flux sortant	Tª color Tª couleur	A	B	C	D	Cierre Fasteners Fermetures	Embalaje Packaging Emballage
	(W)	(Lm)	(Lm)	(°K)	(mm)	(mm)	(mm)	(mm)			
13	600	13	1490	1210	3000	664	260	100	110	6	1
14	600	13	1550	1259	4000	664	260	100	110	6	1
23	600	16	2560	2079	3000	664	260	100	110	6	1
24	600	16	2670	2168	4000	664	260	100	110	6	1
13	1200	24	2980	2420	3000	1274	870	100	110	8	1
14	1200	24	3200	2598	4000	1274	870	100	110	8	1
23	1200	32	5120	4157	3000	1274	870	100	110	8	1
24	1200	32	5340	4336	4000	1274	870	100	110	8	1
13	1500	29	3720	3021	3000	1575	650	100	110	12	1
14	1500	29	4000	3248	4000	1575	650	100	110	12	1
23	1500	40	6310	5124	3000	1575	650	100	110	12	1
24	1500	40	6700	5440	4000	1575	650	100	110	12	1

ACCESORIOS



Ref.

Grapa de acero inoxidable
Stainless steel clip
Clip acier inox



Sujeción a carril
Rail fastening
Platine de fixation sur rail

LÍNEA CONTINUA
CONTINUOUS LINE CONNECTION
CÂBLAGE TRAVERSANT

3 polos / 3 poles / 3 pôles

5 polos / 5 poles / 5 pôles

1-10
DALI

EMERGENCY
1h / 3h

Brenner vuk GmbH
LED.beLICHTungen

AT - 1230 Wien · Isoppgasse 22
T 0664 4554227 · F (01) 318 0567
LED.at@aon.at · www.led-brenner.at